TX433-JKD-20 Product Data Sheet v1.0



Chengdu Ebyte Electronic Technology Co.,Ltd.

Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

Product Introduction TX433-JKD-20



TX433-JKD-20 is a 433MHz bendable rubber antenna. Height of the antenna is 200mm. With a SMA-J interface (SMA inner screw thread and inner needle), it can be applied to such broadband communication system, WiFi, mobile terminal devices with frequency of 433MHz as router, AP,radio, aircard, smart TV and so on.

Other Parameters TX433-JKD-20

No.	Parameter item	Parameter details & Description
1	Height	200mm
2	Total Weight	21g
3	Coat Material	TPEE
4	Interface	SMA-J (SMA inner screw thread and inner needle)
5	Working Temperature	-40℃～+85℃
6	Storage Temperature	-40℃～+85℃

Physical Parameters TX433-JKD-20

No.	Parameter item	Parameter details & Description
1	Frequency	433MHz
2	Bandwidth	400-470MHz
3	Gain	3dBi
4	SWR	≤1.5
5	Polarization	Vertical
6	Radiation Direction	Omnidirectional
7	Input Impedance	50Ω
8	Power Capacity	20W

Copyright ©2012–2019，Chengdu Ebyte Electronic Technology Co.,Ltd.


LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

Size TX433-JKD-20



Testing TX433-JKD-20


1、VSWR

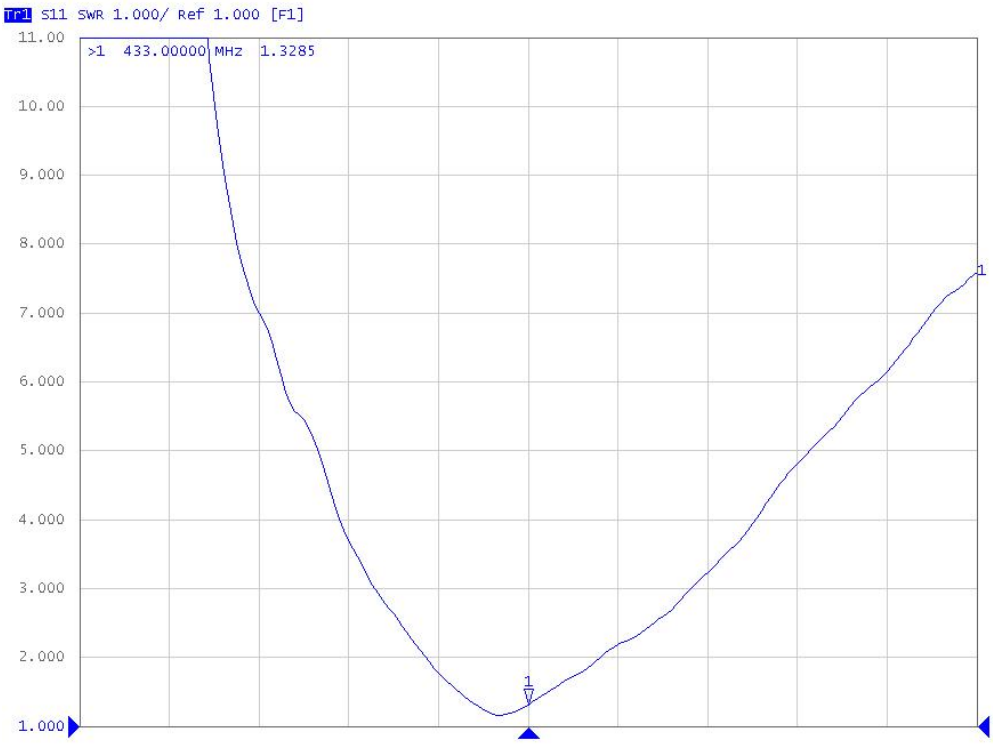

Copyright ©2012–2019，Chengdu Ebyte Electronic Technology Co.,Ltd.

Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

2、Smith

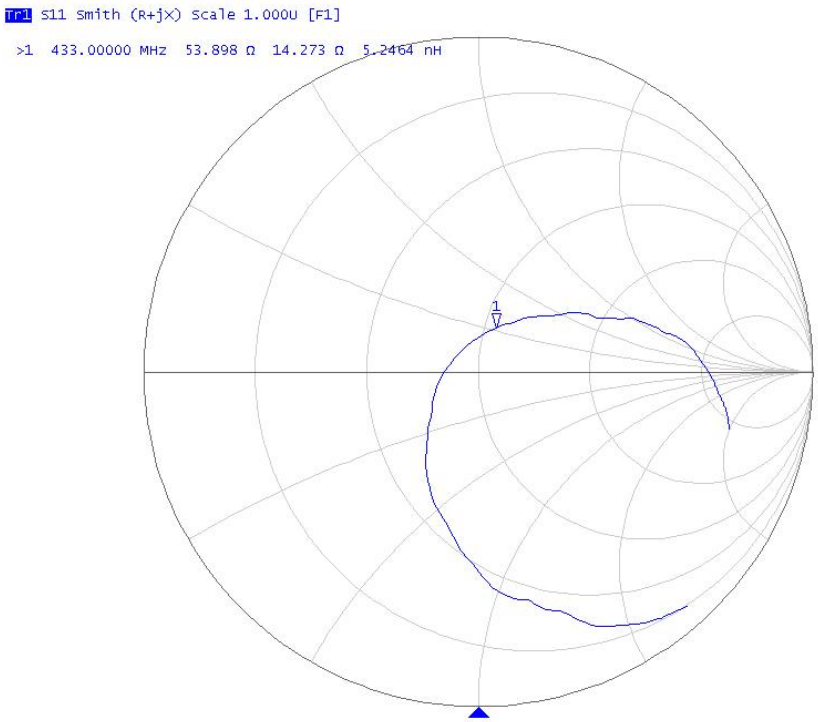

FAQ TX433-JKD-20

- Antenna frequency shall be matched with that of the wireless devices, or the communication will be affected;
- Diffraction performance will be better with lower communication frequency and longer wave;
- Communication distance will be shorter if there is any straight-line barrier;
- Please be noted of the antenna radiation direction. Incorrect direction by installation will result in short communication distance;
- As radio wave may be absorbed by the ground, result will be affected if tested close to ground. It is suggested to test at a higher place;
- As radio wave can be highly absorbed by the ocean water, result will be affected if tested close to the sea;
- Signal will be seriously weakened if the antenna is put close to metal or inside metal shell;
- Lower impedance matching of antenna and communication devices will result in bad communication.

Copyright ©2012–2019，Chengdu Ebyte Electronic Technology Co.,Ltd.

Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

About us

Technical support: support@cdebyte.com

Documents and RF Setting download link: www.cdebyte.com

Thank you for using Ebyte products! Please contact us with any questions or suggestions: lirong@cdebyte.com

---

Phone：028-61543675

Web: www.cdebyte.com

Address:Building B5, Mould Industrial Park, 199# Xi-Qu Ave, West High-tech Zone, Chengdu, 611731, Sichuan, China

Chengdu Ebyte Electronic Technology Co.,Ltd.

Copyright ©2012–2019，Chengdu Ebyte Electronic Technology Co.,Ltd.

Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000