TX433-FPC-3208 Product Data Sheet v1.0



Chengdu Ebyte Electronic Technology Co.,Ltd.

Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

Product Introduction TX433-FPC-3208



TX433-FPC-3208 is a 433MHz FPC internal antenna. Size of the antenna is 32*8mm. With a IPX-I interface, it can be applied to such devices with frequency of 433MHz as wireless module, network devices.

Other Parameters TX433-FPC-3208

No.	Parameter item	Parameter details & Description
1	Size	32*8mm
2	Total Weight	1g
3	Material	FPC
4	Feeder Length	90mm
5	Interface	IPX-I
6	Working Temperature	-40℃～+85℃

Physical Parameters TX433-FPC-3208

No.	Parameter item	Parameter details & Description
1	Frequency	433MHz
2	Bandwidth	423-443MHz
3	Gain	2dBi
4	SWR	≤1.5
5	Polarization	Linear
6	Radiation Direction	Omnidirectional
7	Input Impedance	50Ω
8	Power Capacity	2W

Copyright ©2012–2020， Chengdu Ebyte Electronic Technology Co.,Ltd.


Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

Size TX433-FPC-3208



Testing TX433-FPC-3208


1、VSWR

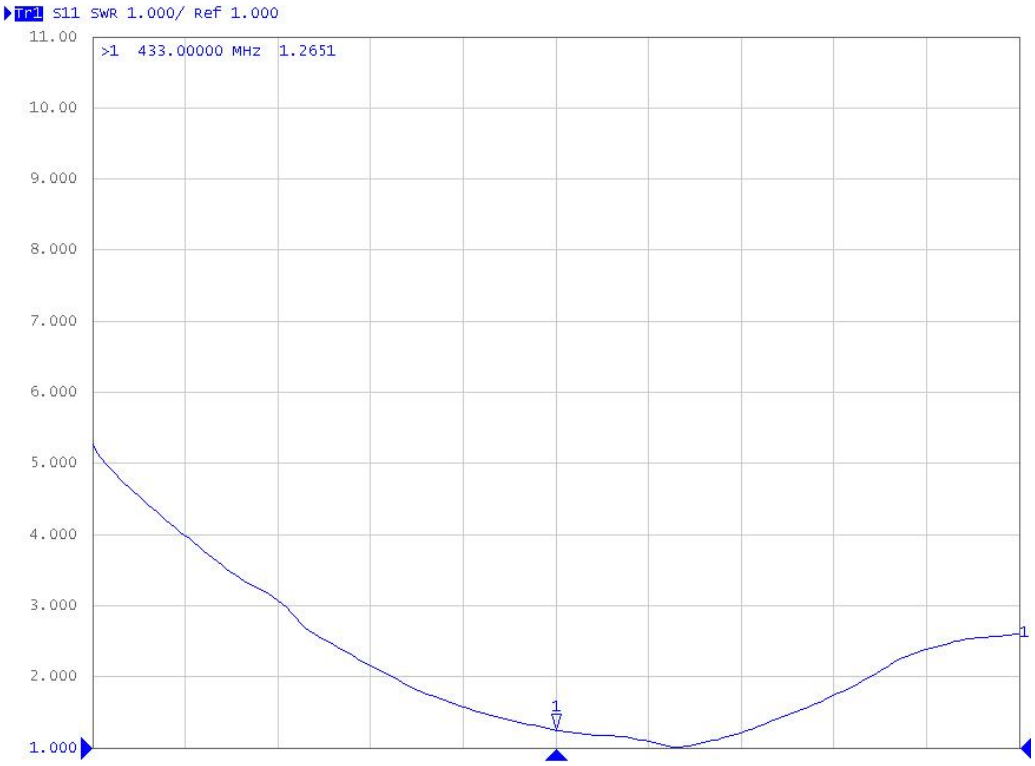

Copyright ©2012–2020， Chengdu Ebyte Electronic Technology Co.,Ltd.

Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

2、Smith

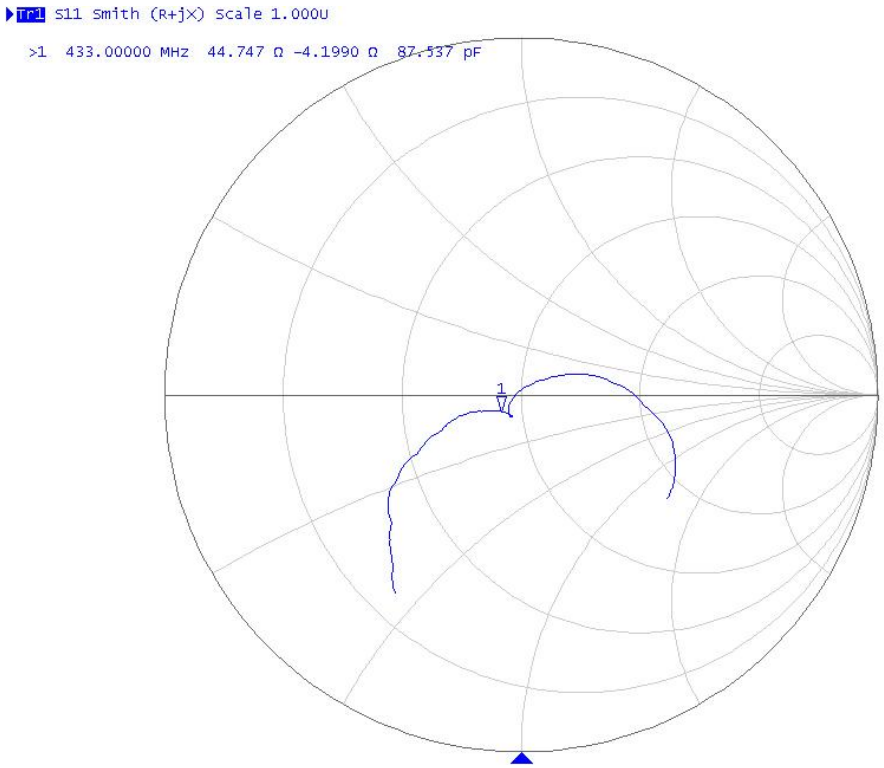

FAQ TX433-FPC-3208

- Antenna frequency shall be matched with that of the wireless devices, or the communication will be affected;
- Diffraction performance will be better with lower communication frequency and longer wave;
- Communication distance will be shorter if there is any straight-line barrier;
- Please be noted of the antenna radiation direction. Incorrect direction by installation will result in short communication distance;
- As radio wave may be absorbed by the ground, result will be affected if tested close to ground. It is suggested to test at a higher place;
- As radio wave can be highly absorbed by the ocean water, result will be affected if tested close to the sea;
- Signal will be seriously weakened if the antenna is put close to metal or inside metal shell;
- Lower impedance matching of antenna and communication devices will result in bad communication.

Disclaimer

EBYTE reserves all rights to this document and the information contained herein. Products, names, logos and designs described herein may in whole or in part be subject to intellectual property rights. Reproduction, use, modification or disclosure to third parties of this document or any part thereof without the express permission of EBYTE is strictly prohibited.

The information contained herein is provided "as is" and EBYTE assumes no liability for the use of

Copyright ©2012–2020， Chengdu Ebyte Electronic Technology Co.,Ltd.

Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

the information. No warranty, either express or implied, is given, including but not limited, with respect to the accuracy, correctness, reliability and fitness for a particular purpose of the information. This document may be revised by EBYTE at any time. For most recent documents, visit www.cdebyte.com.

About us

Technical support: support@cdebyte.com
Documents and RF Setting download link: www.cdebyte.com
Thank you for using Ebyte products! Please contact us with any questions or suggestions: lirong@cdebyte.com
---
Phone：028-61543675
Web: www.cdebyte.com
Address:Building B5, Mould Industrial Park, 199# Xi-Qu Ave, West High-tech Zone, Chengdu, 611731, Sichuan, China

Chengdu Ebyte Electronic Technology Co.,Ltd.

Copyright ©2012–2020， Chengdu Ebyte Electronic Technology Co.,Ltd.

Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000