AM21-24W24V

24W Low Power AC-DC Step-down Power Supply Module




Chengdu Ebyte Electronic Technology Co.,Ltd.

Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

1.Product introduction

1.1. Brief introduction



AM21-24W24V is an ultra-small size switching power supply module, used for both AC and DC.
Input voltage 85~264Vac/100~370Vdc, ultra-low ripple, ultra-low power consumption, high efficiency,Safety isolation, high reliability and other advantages; complies with IEC60950, EN60950, UL60950 Certification standards, peripherals do not need to add EMI-related components, significantly reducing user design challengesthreshold;
users do not need to consider stability, even in extremely complex voltage environments, they can be stable fixed output.

1.2. Product features

- Ultra-low ripple: full load ripple is less than 120mV.
- Ultra-small size: 52.5*35.2*25.6mm.
- Input voltage: Global common voltage 85 ~ 264Vac/100~370Vdc.
- Certification standards: Comply with IEC60950, EN60950, UL60950 certification standards, no need to add EMI related components to peripherals.
- Protection measures: overvoltage protection, overcurrent protection, short circuit protection, overtemperature protection.
- High-quality solution: greatly improves work efficiency, with an average efficiency of 83%.

1.3. Application scenarios

- Car charging piles;
- Security alarm;
- Smart home;
- Industrial, electric power, instrumentation;
- MCU motherboard (MCU);
- Smart street lights, energy-saving lamps;
- Smart switches and sockets;
- RF communication equipment;

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

2.Specification parameters

2.1. Limit parameters

Order number	Main parameter	Minimum	Maximum	Remarks
1	Input voltage （Vac）	85	264	Vac
2	Input voltage （Vdc）	100	370	Vdc
3	output power （W）	0	24	W
4	working temperature （℃）	-40	+85	**ta=40℃,tc=85℃**


2.2. Working parameters


Order number	Main parameter	minimum	Typical value	Maximum	Remarks
1	Input voltage(Vac)	100	220	250	Vac
2	Input voltage(Vdc)	120	-	350V	Vdc
3	working frequency (Hz)	-	50/60	-	Hz
4	output power(W)	0	-	24	W
5	working temperature (℃)	-40	+25	85	ta=40℃,tc=85℃
6	Power factor	0.4	-	0.55	>0.55 at 120Vac / >0.4 at 230Vac Full load
7	Static power(mA)	-	-	1.0	< =1 mA / 240Vac
8	output voltage(Vdc)	24.0	24	24.2	V

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

9	Persistent current(mA)	0	-	1	Maximum continuous current
10	ripple noise(mV)	100	-	120	Full load<=120mV
11	Average efficiency (n%)	-	87	-	Vo=24V
12	Over current protection (%)	110	-	150	Constant current limit, can automatic recover
13	Short circuit protection	-	-	-	Hiccup mode, can automatic recover after elimination of failure state
14	Working humidity (RH%)	20	-	90	Non-condensing
15	Storage temperature (℃)	-40	+25	+85	Dry storage at normal temperature;
16	Storage humidity (RH%)	10	-	90	Dry storage at normal temperature;
17	Withstand voltage test	-	-	3000	I/P - O/P: 3000VAC
18	Insulation impedance	-	-	100	I/P - O/P: 100M ohms / 500VDC at 25 ℃


2.3.Work efficiency and load

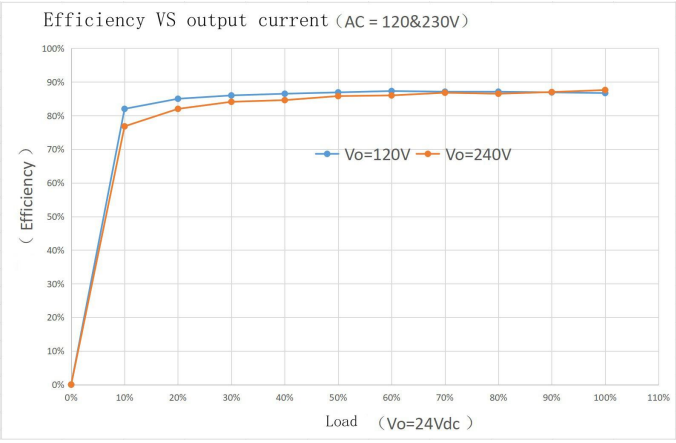

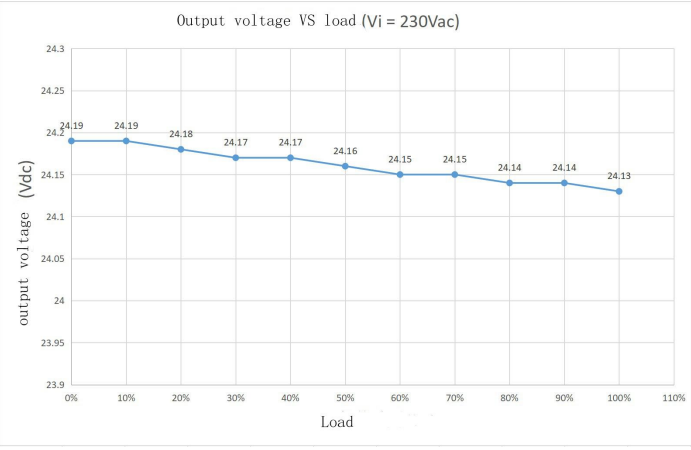


Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

2.4.Start-up time

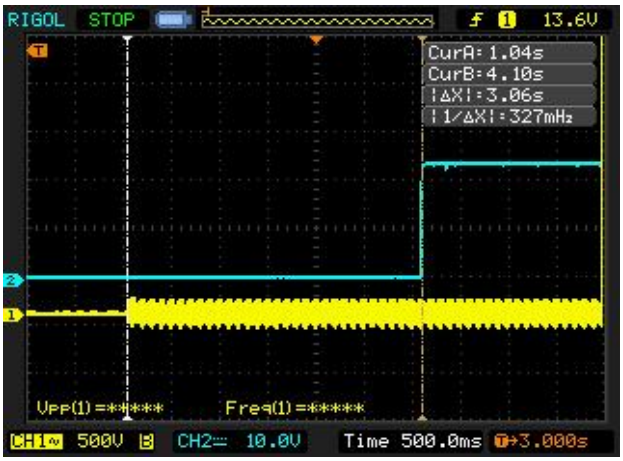


INPUT:AC 120V OUTPUT:24V 1A

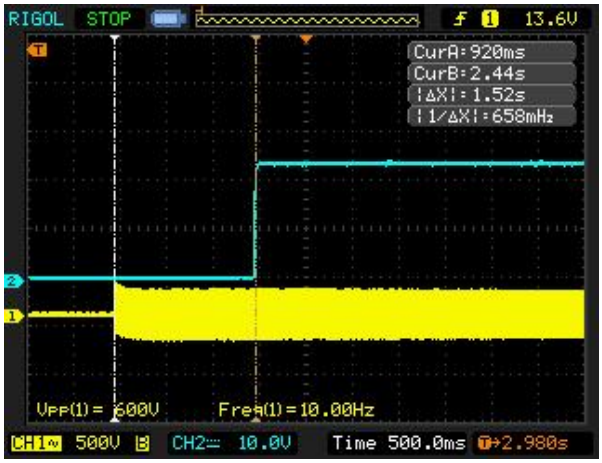

INPUT:AC 230V OUTPUT:24V 1A

2.5.Full-load ripple

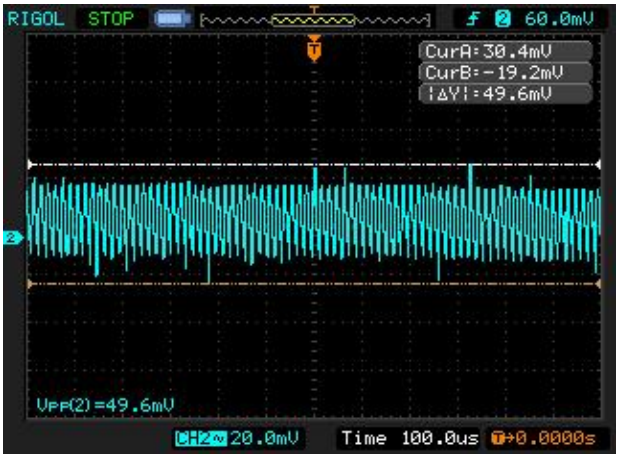


INPUT:AC 120V OUTPUT:24V 1A




INPUT:AC 230V OUTPUT:24V 1A

2.6.Working frequency

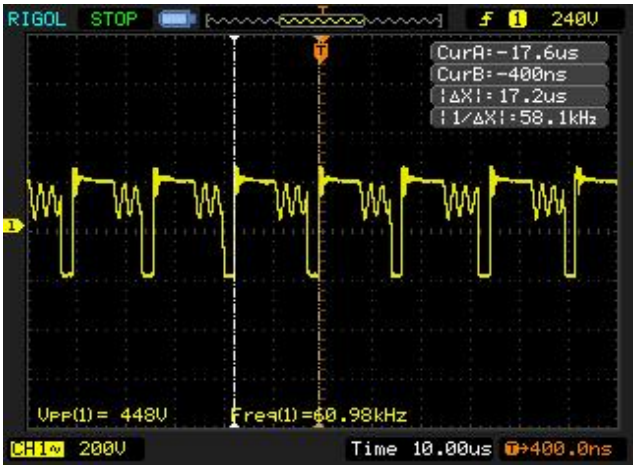

OUTPUT:24V 1A

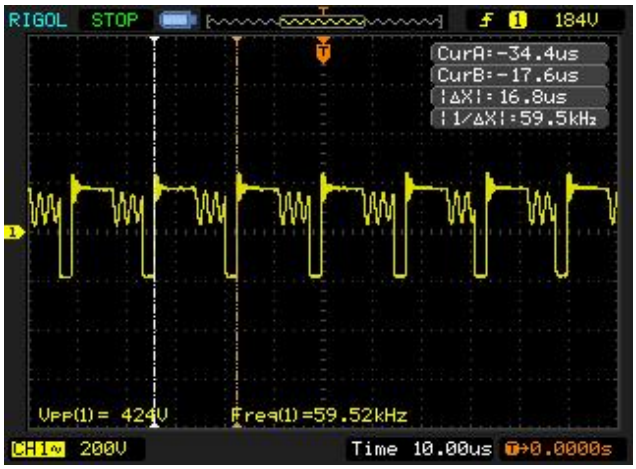

OUTPUT:24V 1A

Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

Copyright ©2012–2021，Chengdu Ebyte Electronic Technology Co.,Ltd


3.Basic operation

3.1.Notes

- Operating this module requires certain professional skills, prohibit non-professionals operate on it!
- Be sure to carefully study the knowledge of safe use before use.
- After power on, be careful not to touch the L and N power lines with your body to prevent electric shock accidents. It is recommended to add isolation at the input front end.
- The maximum input voltage must not exceed 250Vac, otherwise the module may be permanently damaged.
- During daily maintenance, the input power supply should be disconnected first to prevent electric shock and accidents.


3.2.Typical application

*Note: No additional components are required for input and output. Meet safety certification requirements.

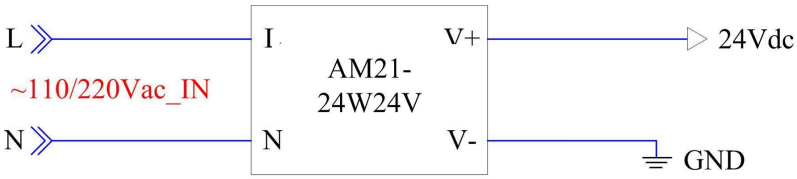

4.Mechanical Characteristics and Pin Definition

4.1. Product size

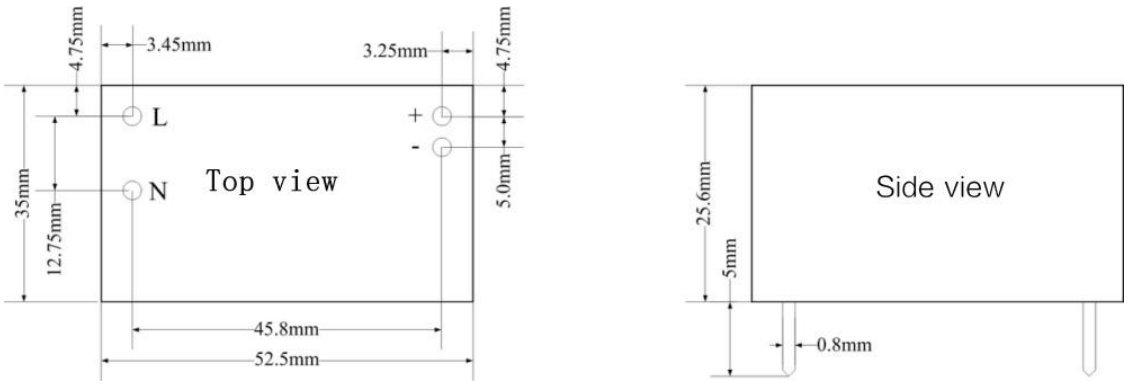

4.2. Pin Definition

Order number	Pin name	Orientation	Use
1	L	Input	AC power input

Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

2	N	Input	AC power input
3	-	Output	Direct-current output, power ground.
4	+	Output	Direct-current output, positive power supply.

5. Product selection

Product model	input voltage	Output voltage	Output current	efficiency	Installation mode
AM21-24W05V	100 ~ 250Vac	5Vdc	4A	76%	Plastic package plug-ins
AM21-24W12V	100 ~ 250Vac	12Vdc	2A	79%	Plastic package plug-ins
AM21-24W24V	100 ~ 250Vac	24Vdc	1A	87%	Plastic package plug-ins

Revision history

Order number	vision	modification date	Revision notes	Maintain person
1	V1.0	20190301	First edition, first public release	Deng
1	V1.1	20190801	Change parameters	Deng

About us

Technical support: support@cdebyte.com

Documents and RF Setting download link: www.cdebyte.com

Thank you for using Ebyte products! Please contact us with any questions or suggestions: lirong@cdebyte.com

---

Phone：028-61543675

Web: : www.cdebyte.com

Address:Building B2, Mould Industrial Park, 199# Xi-Qu Ave, West High-tech Zone, Chengdu, 611731, Sichuan, China

Chengdu Ebyte Electronic Technology Co.,Ltd.

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000