E101-32 series development board User manual



Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

Chengdu Ebyte Electronic Technology Co.,Ltd.

Catalog

Disclaimer and copyright notice 1
1. Module introduction 2
1.1 Features 2
1.2 Parameters 2
2. Function introduction 3
2.1 components 3
2.2 Pin definition 4
2.3 Notes 6
3. Program burning guide 6
4. Version 6
5. About us 7

Copyright ©2012–2022,Chengdu Ebyte Electronic Technology Co.,Ltd

Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

Disclaimer and copyright notice

The information in this article, including the URL for reference, is subject to change without notice. The document is provided "as is" without warranty of any kind, including any warranties of merchantability, fitness for a particular purpose or non-infringement, and any warranties of any proposal, specification or sample referred to elsewhere. This document disclaims any liability, including any liability for any patent infringement arising from the use of the information contained herein. No estoppel or other license to use any intellectual property rights, express or implied, is granted herein.

The test data in this paper are all obtained by EBAI laboratory test, the actual results may be slightly different.

It is hereby stated that all trade names, trademarks and registered trademarks mentioned herein are the property of their respective owners.

Chengdu Yibai Electronic Technology Co., LTD reserves the right of final interpretation.

Note:


This manual is subject to change due to product version upgrade or other reasons. Ebai Electronic Technology Co., Ltd. reserves the right to modify the contents of this manual without any notice or prompt. This manual is for use only. Chengdu Ebaite Electronic Technology Co., Ltd. makes every effort to provide accurate information in this manual, but Chengdu Ebaite Electronic Technology Co., Ltd. does not guarantee that the content of this manual is completely free from error, and all statements, information and recommendations in this manual do not constitute any express or implied warranty.

Copyright ©2012–2025,Chengdu Ebyte Electronic Technology Co.,Ltd


Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

1. Module introduction


1.1 Features

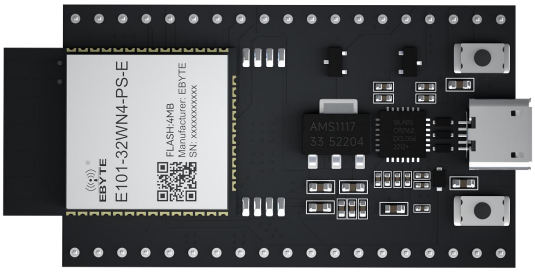

E101-32WN4-PS-E

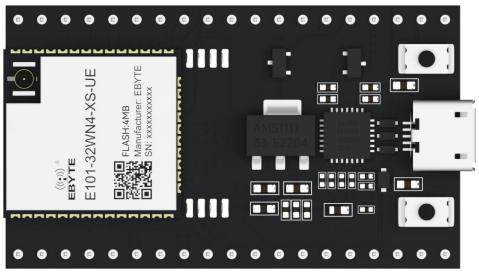

E101-32WN4-XS-UE

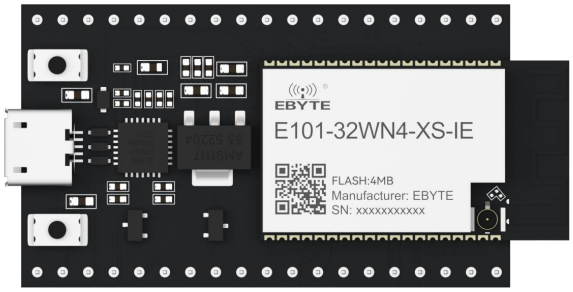

E101-32WN4-XS-IE

E101-32WN4-XS-IE-TB 、E101-32WN4-PS-E-TB、E101-32WN4-XS-UE-TB are three entry-level development boards that use the corresponding modules of the E101-32 series as required. The development board has complete Wi-Fi and Bluetooth low power functions, and most of the pins of the module on the board have been drawn to the two sides of the pin row, developers can easily connect a variety of peripheral devices through jumper, and can also plug the development board into the breadboard for use.

1.2 Parameters

Item	Parameter name	Value	Note
1	Support Modules	E101-32WN4-XS-IE E101-32WN4-PS-E E101-32WN4-XS-UE	WiFi serial port module
2	Size	48.2 * 27.9mm	USB connector included
3	Production process	Lead-free process, machine paste	Wireless products must be machine attached to ensure batch consistency and reliability
4	Power supply	USB	-

Copyright ©2012–2025,Chengdu Ebyte Electronic Technology Co.,Ltd

Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

	interface		
5	Communication interface	TTL	-
6	Working temperature	-40 ℃~ +85℃	Industrial grade
7	Working humidity	10%RH ~ 90%RH	Relative humidity, no condensation
8	Storage temperature	-40 ℃~ +125℃	Industrial grade

2. Function introduction

2.1 components

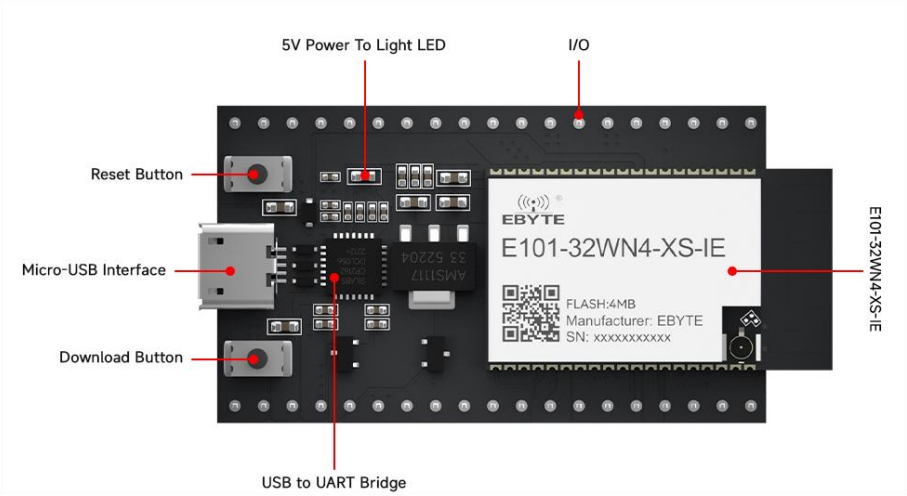


Figure 1 Main components The E101-32WN4-XS-IE module is used as an example

Item	Firmware	Introduction
1	E101-32 series of modules	A module based on the E101-32 series. For more information, please download the relevant materials from the official website
2	EN	Reset button.
3	Boot	Download button. Press and hold the Boot key, and press the EN key (do not release the Boot key at this time) to enter the Firmware Download mode, and download the firmware through the serial port.
4	USB-to-UART bridge	Single-chip USB-UART bridge that provides transfer rates of up to 1 Mbps.

Copyright ©2012–2025,Chengdu Ebyte Electronic Technology Co.,Ltd

Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

5	Micro USB connector	The USB port can be used as the power supply for the circuit board or the communication port for connecting the PC to the ESP32 series module.
6	5V Power On LED	When the development board is powered on (USB or external 5 V), the indicator will light up. See schematics in related documents for more information.
7	I/O	Most of the pins of the on-board module have been drawn to the development board's row pins. Users can program ESP32 to realize PWM, ADC, DAC, I2C, I2S, SPI and other functions.

Note: For specific function instructions, refer to the user manual of the E101-32 series corresponding module.

2.2 Pin definition

The following is a front view of E101-32WN4-PS-E-TB as an example:

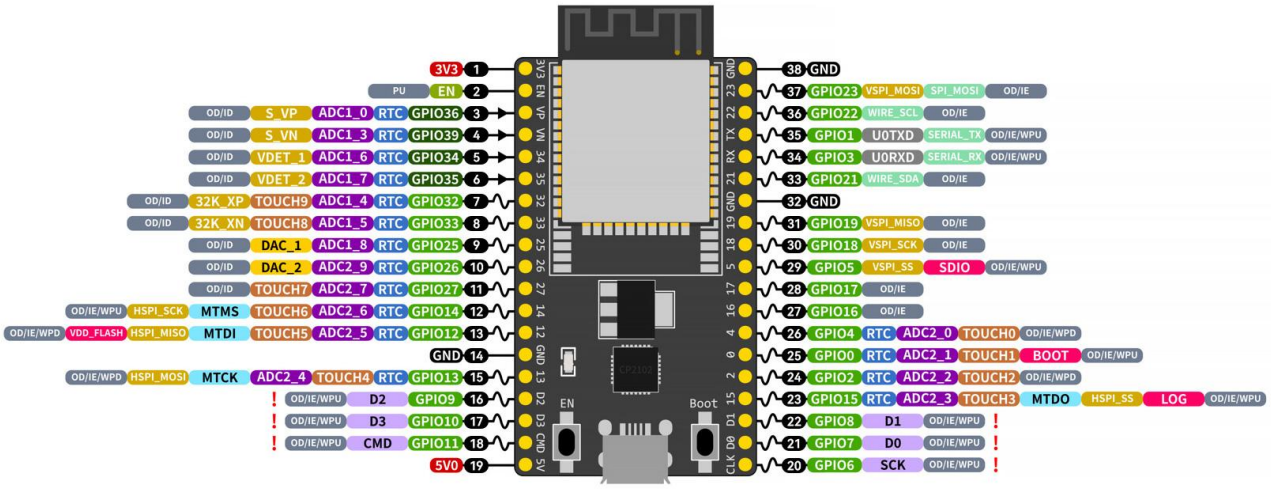


Figure 2. Current test interface diagram

Pin number	Pin name	Type	Pin description
1	3V3	P	3.3 V power supply
2	EN	I	CHIP_PU, Reset
3	VP	I	GPIO36, ADC1_CH0, S_VP
4	VN	I	GPIO39, ADC1_CH3, S_VN
5	IO34	I	GPIO34, ADC1_CH6, VDET_1
6	IO35	I	GPIO35, ADC1_CH7, VDET_2

Copyright ©2012–2025,Chengdu Ebyte Electronic Technology Co.,Ltd

Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

7	IO32	I/O	GPIO32, ADC1_CH4, TOUCH_CH9, XTAL_32K_P
8	IO33	I/O	GPIO33, ADC1_CH5, TOUCH_CH8, XTAL_32K_N
9	IO25	I/O	GPIO25, ADC1_CH8, DAC_1
10	IO26	I/O	GPIO26, ADC2_CH9, DAC_2
11	IO27	I/O	GPIO27, ADC2_CH7, TOUCH_CH7
12	IO14	I/O	GPIO14, ADC2_CH6, TOUCH_CH6, MTMS
13	IO12	I/O	GPIO12, ADC2_CH5, TOUCH_CH5, MTDI
14	GND	G	Ground
15	IO13	I/O	GPIO13, ADC2_CH4, TOUCH_CH4, MTCK
16	D2	I/O	GPIO9, D2
17	D3	I/O	GPIO10, D3
18	CMD	I/O	GPIO11, CMD
19	5V	P	5 V power supply
20	CLK	I/O	GPIO6, CLK
21	D0	I/O	GPIO7, D0
22	D1	I/O	GPIO8, D1
23	IO15	I/O	GPIO15, ADC2_CH3, TOUCH_CH3, MTDO
24	IO2	I/O	GPIO2, ADC2_CH2, TOUCH_CH2
25	IO0	I/O	GPIO0, ADC2_CH1, TOUCH_CH1, Boot
26	IO4	I/O	GPIO4, ADC2_CH0, TOUCH_CH0
27	IO16	I/O	GPIO16
28	IO17	I/O	GPIO17
29	IO5	I/O	GPIO5
30	IO18	I/O	GPIO18
31	IO19	I/O	GPIO19
32	GND	G	Ground
33	IO21	I/O	GPIO21
34	RX	I/O	GPIO3, U0RXD
35	TX	I/O	GPIO1, U0TXD
36	IO22	I/O	GPIO22
37	IO23	I/O	GPIO23
38	GND	G	Ground

Note: 1.P: power supply; I: input; O: output;

2.Pins D0, D1, D2, D3, CMD, and CLK are used for internal communication between the ESP32 chip and the SPI flash and are centrally distributed on both sides of the development board near the USB port. In general, it is best if these pins are not connected, otherwise they may affect the work of SPI flash/SPI RAM.

3. Pin GPIO16 and GPIO17 are only applicable to the onboard E101-32WN4-PS-E and E101-32WN4-XS-UE series development board. Pin GPIO16 and GPIO17 of the onboard E101-32WN4-XS-IE development board are reserved for internal use.

Copyright ©2012–2025,Chengdu Ebyte Electronic Technology Co.,Ltd

Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

2.3 Notes

If you think C15 may affect the use of the development board, you can remove C15 completely. The specific location of C15 on the development board is shown in the yellow section below.

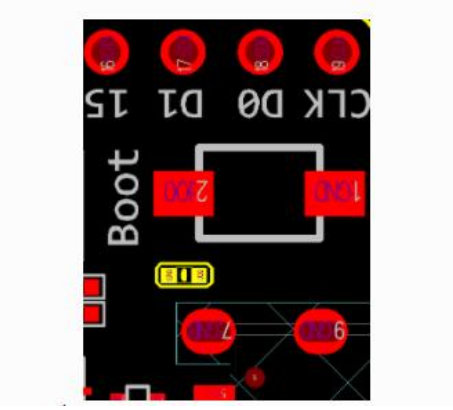


Figure 3

3. Program burning guide

- Electricity before, please make sure that ESP32 WROVER - IE/ESP32 WROOM - 32 E/ESP32 - WROOM - UE is in good condition.
- Prepare tools: E101-32WN4-XS-IE-TB /E101-32WN4-PS-E-TB/ E101-32WN4-XS-UE-TB, USB 2.0 data cable (standard type A to Micro-B, computer (Windows, Linux, or macOS). (Make sure you use the appropriate USB cable, some of which can only be used for charging, not for data transfer and programming.)
- Connected to the USB cable in PC software program burn;

4. Version

Version	Revise date	Revise description	Maintenance person
1.0	2022-11-22	Initial version	Hao

Copyright ©2012–2025,Chengdu Ebyte Electronic Technology Co.,Ltd

Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

5. About us

Sales Hotline: 4000-330-990
Technical support: support@cdebyte.com
Official website: https://www.cdebyte.com
Company Address: Building B5, No. 199, West District Avenue, High-tech West District, Chengdu City, Sichuan Province

成都亿佰特电子科技有限公司
Chengdu Ebyte Electronic Technology Co.,Ltd.

Copyright ©2012–2025,Chengdu Ebyte Electronic Technology Co.,Ltd

Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000