TX490-JKD-20 Product Data Sheet

490MHz Bendable Rubber Antenna

SMA Male Connector



成都亿佰特电子科技有限公司

Chengdu Ebyte Electronic Technology Co.,Ltd.

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

I. Product Introduction

TX490-JKD-20 is a 490MHz bendable rubber antenna. Height of the antenna is 200mm. With a SMA male connector (SMA inner screw thread and inner needle), it can be applied to such broadband communication system, WiFi, mobile terminal devices with frequency of 490MHz as router, AP, radio, aircard, smart TV and so on.

II. Specification and Parameters


Physical Parameters	
Frequency	490MHz
Bandwidth	470-510MHz
Gain	3dBi
SWR	≤1.5
Polarization	Vertical
Radiation Direction	Omnidirectional
Input Impedance	50Ω
Power Capacity	20W
Other Parameters	
Height	200mm
Total Weight	18g
Coat Material	TPEE
Connector	SMA Male (SMA inner screw thread and inner needle)
Working Temperature	-40℃～+85℃
Storage Temperature	-40℃～+85℃




Copyright ©2012–2020, Chengdu Ebyte Electronic Technology Co.,Ltd.

Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

III. Testing

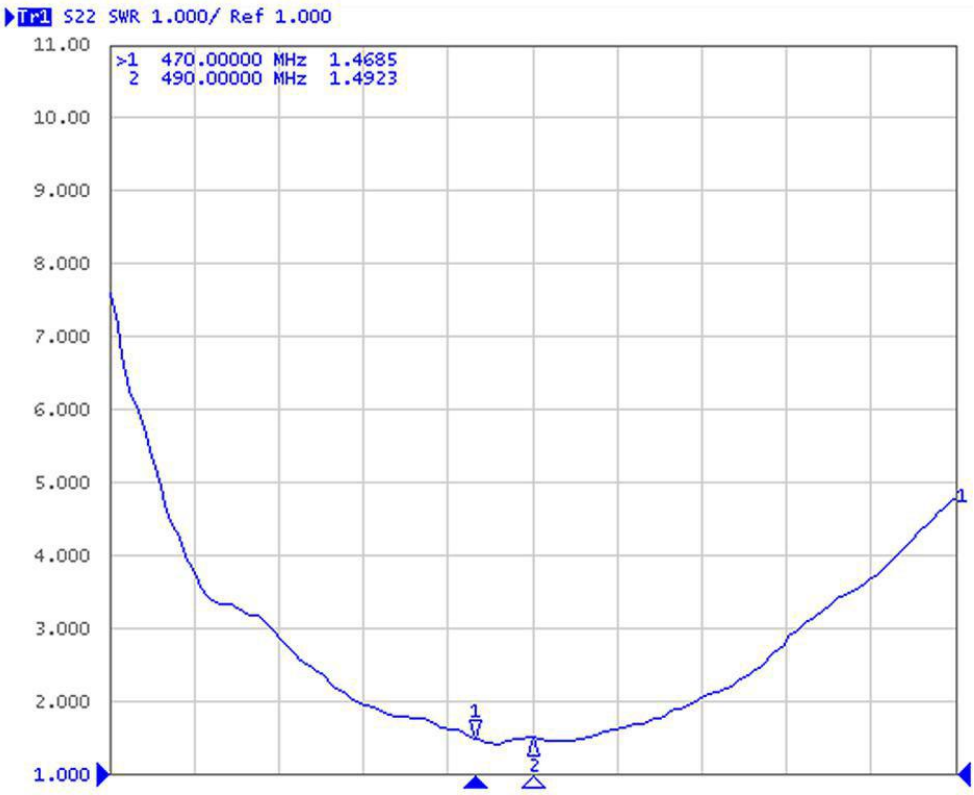

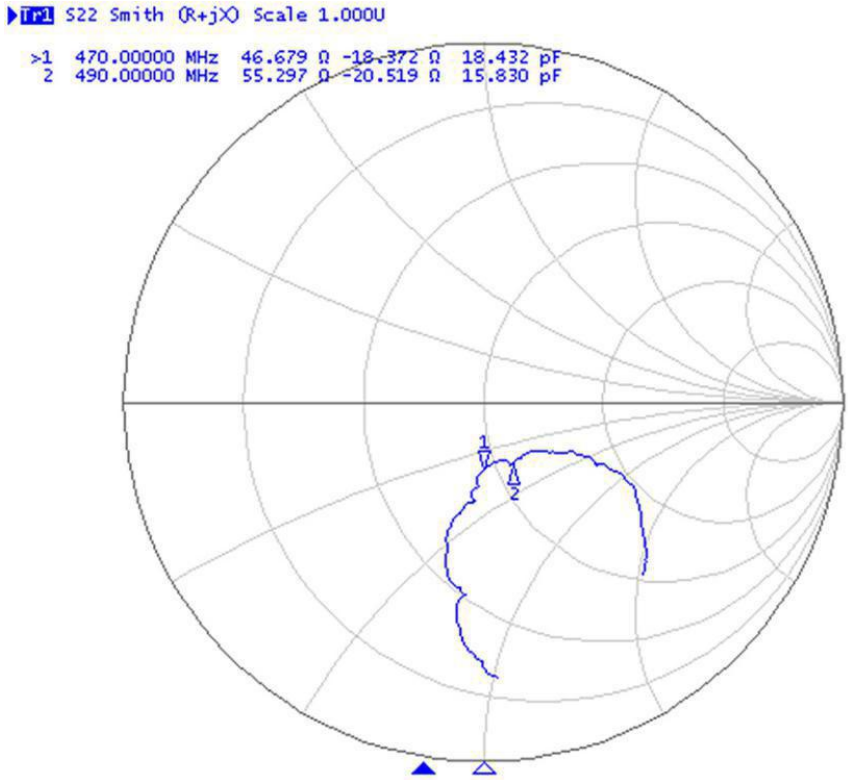

Copyright ©2012–2020, Chengdu Ebyte Electronic Technology Co.,Ltd.

Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

IV. FAQ

- Antenna frequency shall be matched with that of the wireless devices, or the communication will be affected;
- Diffraction performance will be better with lower communication frequency and longer wave;
- Communication distance will be shorter if there is any straight-line barrier;
- Please be noted of the antenna radiation direction. Incorrect direction by installation will result in short communication distance;
- As radio wave may be absorbed by the ground, result will be affected if tested close to ground. It is suggested to test at a higher place;
- As radio wave can be highly absorbed by the ocean water, result will be affected if tested close to the sea;
- Signal will be seriously weakened if the antenna is put close to metal or inside metal shell;
- Lower impedance matching of antenna and communication devices will result in bad communication.

About us

Technical support: support@cdebyte.com
Documents and RF Setting download link: www.ebyte.com
Thank you for using Ebyte products! Please contact us with any questions or suggestions: info@cdebyte.com
---
Fax: 028-64146160 ext. 821
Web: www.ebyte.com
Address: BuildingB5,MouldIndustrialPark,199#XiquAve,WestHigh-techZone,Chengdu,611731,Sichuan,China

成都亿佰特电子科技有限公司
Chengdu Ebyte Electronic Technology Co.,Ltd.

Copyright ©2012–2020, Chengdu Ebyte Electronic Technology Co.,Ltd.

Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000