TX900-PB-2626(NK) Product Data Sheet

915MHz RFID Panel Directional Antenna

N Female Connector



成都亿佰特电子科技有限公司

Chengdu Ebyte Electronic Technology Co.,Ltd.

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

I. Product Introduction

TX900-PB-2626(NK) is a 915MHz RFID panel directional antenna. Size of the antenna is 258mm*258mm*34mm. With a N female connector, it can be applied to such devices with frequency of 915MHz as wireless module, network devices.

II. Specification and Parameters

Physical Parameters	
Frequency	915MHz
Bandwidth	850MHz-960MHz
Gain	12dBi
SWR	≤1.3
Polarization	Circular
Radiation Direction	Directional
Input Impedance	50Ω
Power Capacity	50W
HPBW	Hor:65 Ver:65
Axial Ratio	≤2
Front-Back Ratio	≥20
Lightning Protection	DC Ground
Other Parameters	
Size	258mm*258mm*34mm
Total Weight	850g
Coat Material	ABS+PC
Feeder Length	0.4m
Mounting Hole Size	φ40～φ50
Connector	N Female
Working Temperature	-40℃～+85℃
Storage Temperature	-40℃～+85℃




Copyright ©2012–2019, Chengdu Ebyte Electronic Technology Co.,Ltd.

Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

III.Characteristics


1. Improve the distance recognition of RFID reader

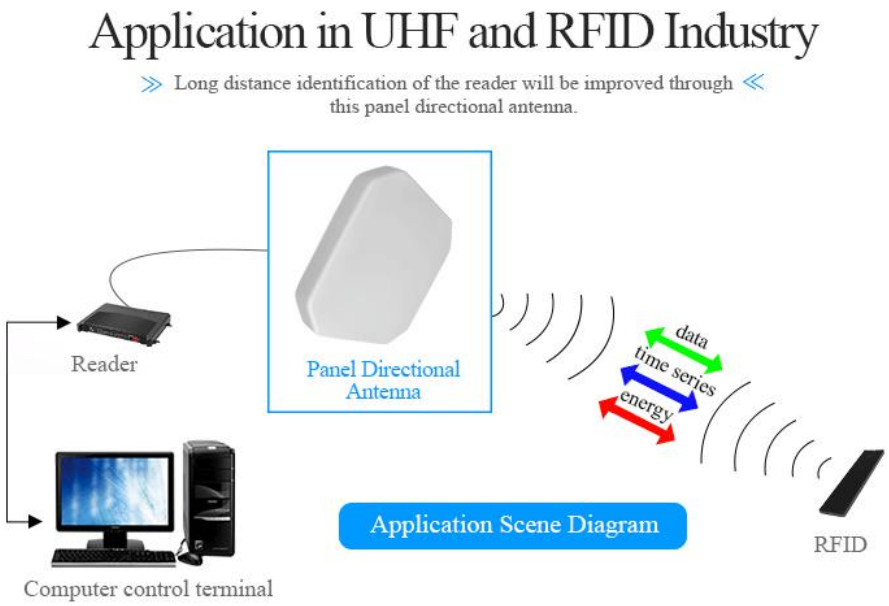


Copyright ©2012–2019, Chengdu Ebyte Electronic Technology Co.,Ltd.

Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

2. Longer communication distance and more stable signal

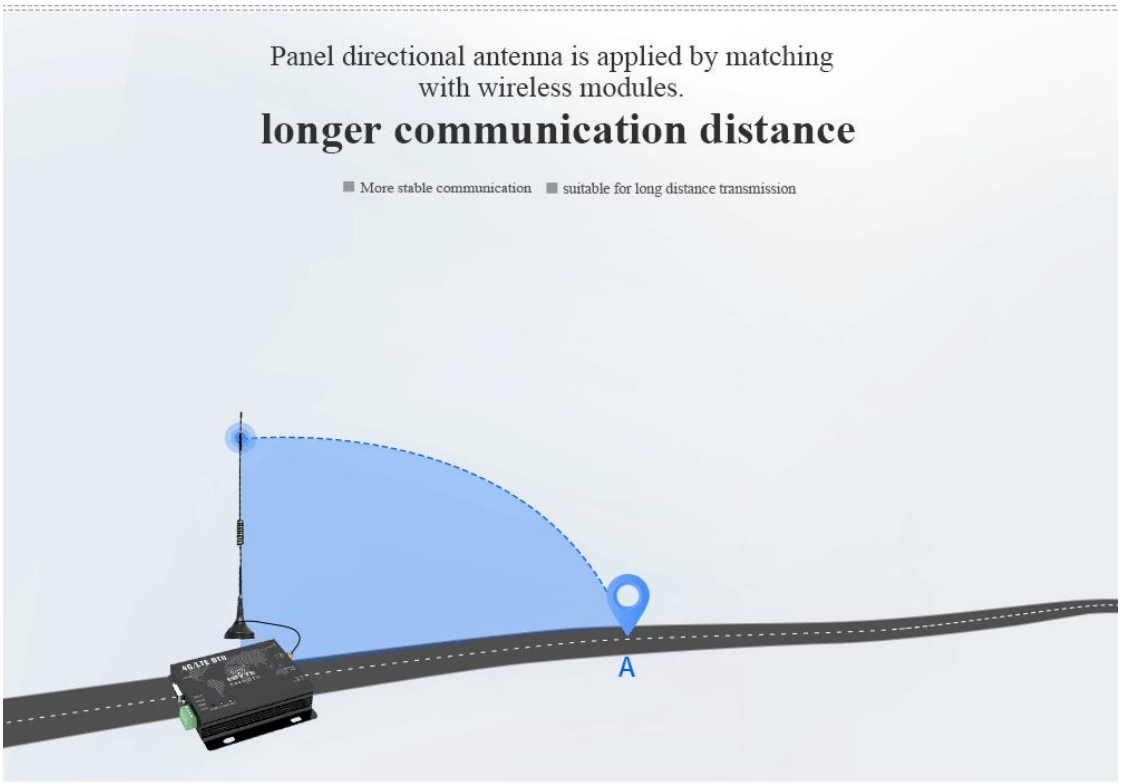


3. Four groups of antenna units greatly improve the gain

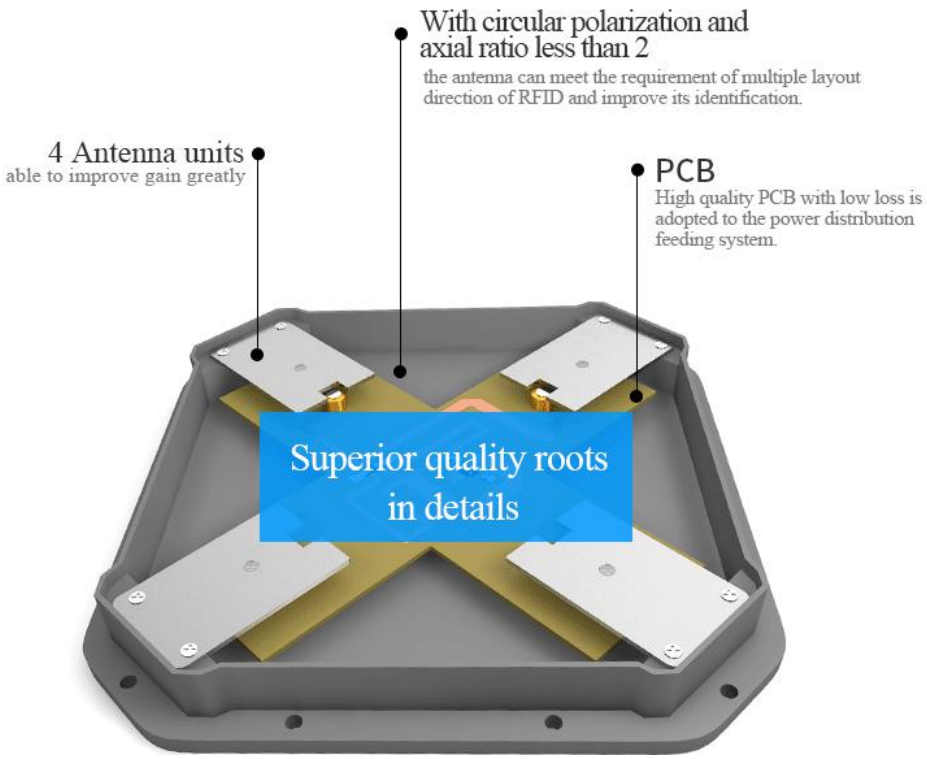


Copyright ©2012–2019, Chengdu Ebyte Electronic Technology Co.,Ltd.

Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

IV. Testing

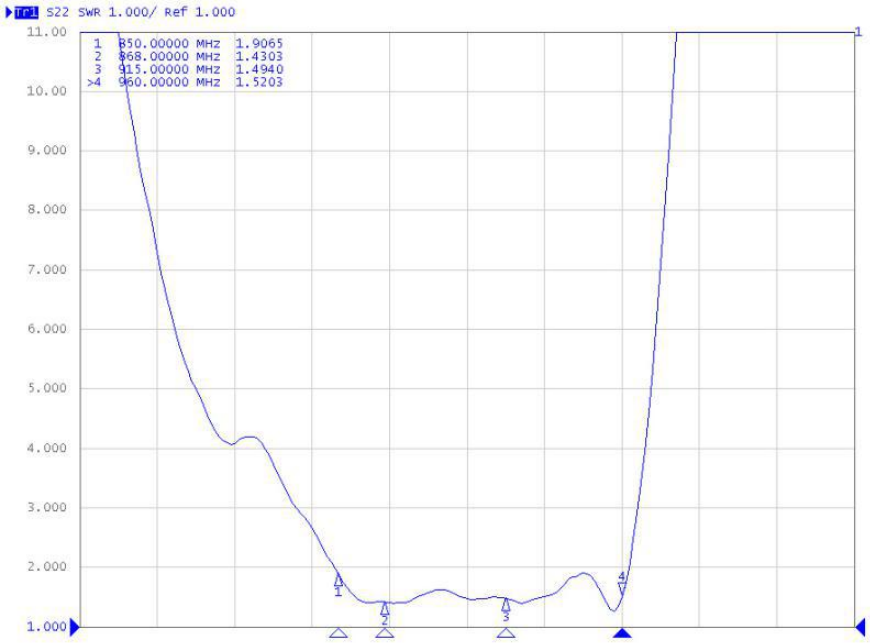

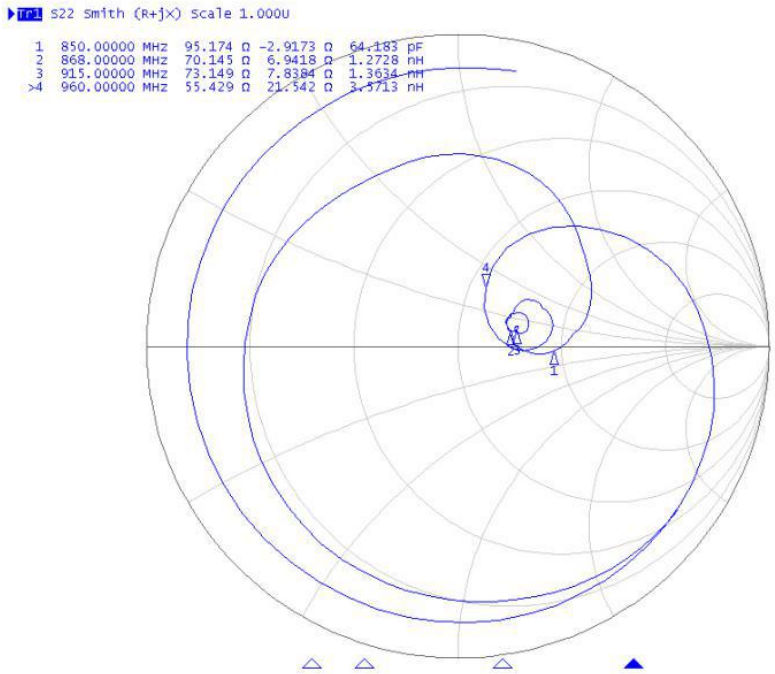

Copyright ©2012–2019, Chengdu Ebyte Electronic Technology Co.,Ltd.

Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

V. FAQ

- Antenna frequency shall be matched with that of the wireless devices, or the communication will be affected;
- Diffraction performance will be better with lower communication frequency and longer wave;
- Communication distance will be shorter if there is any straight-line barrier;
- Please be noted of the antenna radiation direction. Incorrect direction by installation will result in short communication distance;
- As radio wave may be absorbed by the ground, result will be affected if tested close to ground. It is suggested to test at a higher place;
- As radio wave can be highly absorbed by the ocean water, result will be affected if tested close to the sea;
- Signal will be seriously weakened if the antenna is put close to metal or inside metal shell;
- Lower impedance matching of antenna and communication devices will result in bad communication.

About us

Technical support: support@cdebyte.com

Documents and RF Setting download link: www.ebyte.com

Thank you for using Ebyte products! Please contact us with any questions or suggestions: info@cdebyte.com

---

Fax: 028-64146160 ext. 821

Web: www.ebyte.com

Address: Innovation Center D347, 4# XI-XIN Road,Chengdu, Sichuan, China

成都亿佰特电子科技有限公司
Chengdu Ebyte Electronic Technology Co.,Ltd.

Copyright ©2012–2019, Chengdu Ebyte Electronic Technology Co.,Ltd.

Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000