# TX170-XP-200 Datasheet v1.0



Chengdu Ebyte Electronic Technology Co.,Ltd.

Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

## Picture TX170-XP-200



## Physical parameter TX170-XP-200

| No. | Parameter item | Parameter details & Description |
|---|---|---|
| 1 | Model | TX170-XP-200 |
| 2 | Size | 50 cm |
| 3 | Average Weight | 103 ± 1 g |
| 4 | Shape Feature | Sucker antenna |
| 5 | Color | Black |
| 6 | Material | ABS+PC |
| 7 | Connector Type | SMA-J |
| 8 | Cable Length | 200 cm |

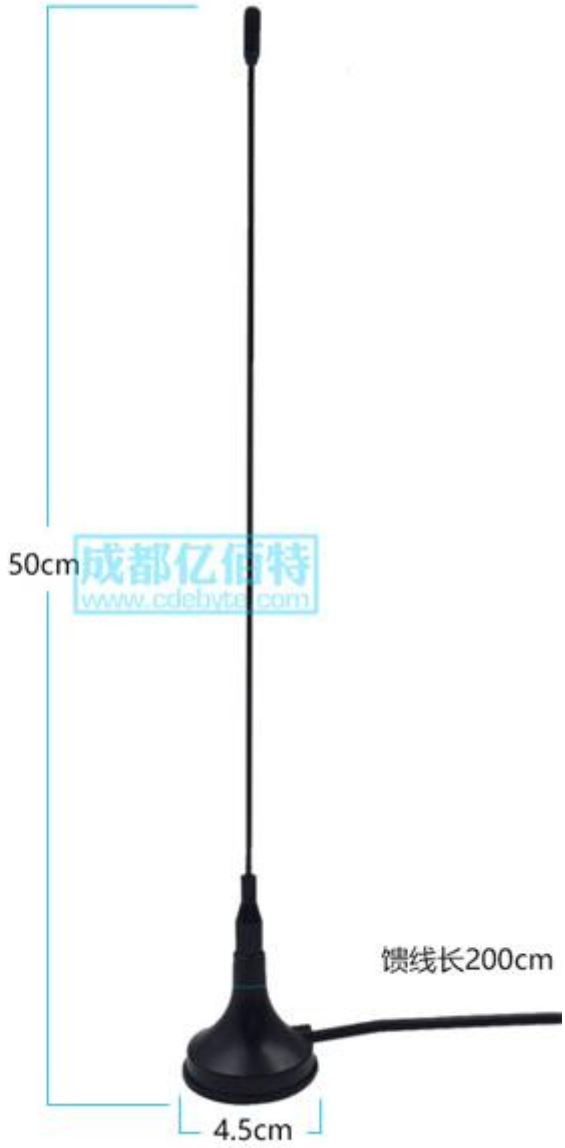
## Electrical parameter TX170-XP-200

| No. | Parameter item | Parameter details & Description |
|---|---|---|
| 1 | Frequency Range | 148 ~ 173 MHz |
| 2 | Gain | 4 dBi |
| 3 | SWR | ≤ 1.5 |
| 4 | Power Capacity | 10 W |
| 5 | Input Impedance | 50 Ω |
| 6 | Polarization Type | Vertical polarization |
| 7 | Radiation Direction | Omnidirectional |

Copyright ©2012–2020， Chengdu Ebyte Electronic Technology Co.,Ltd.


Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

## Dimension TX170-XP-200



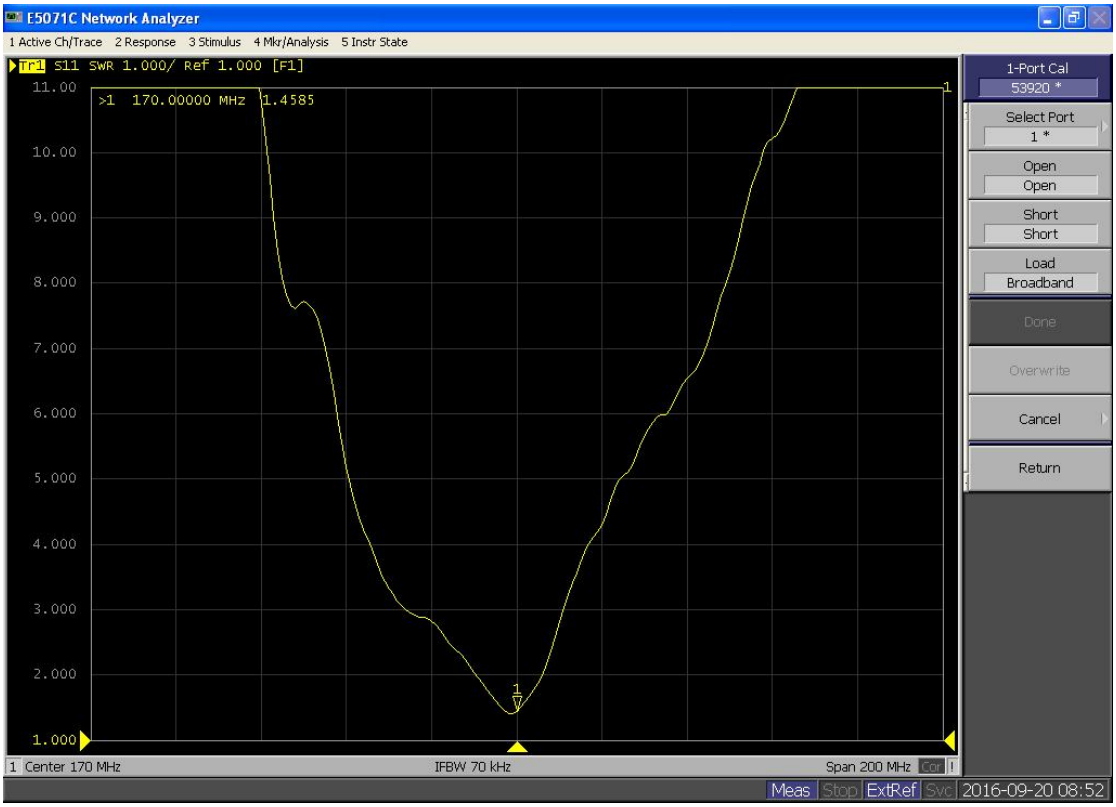

Copyright ©2012–2020， Chengdu Ebyte Electronic Technology Co.,Ltd.

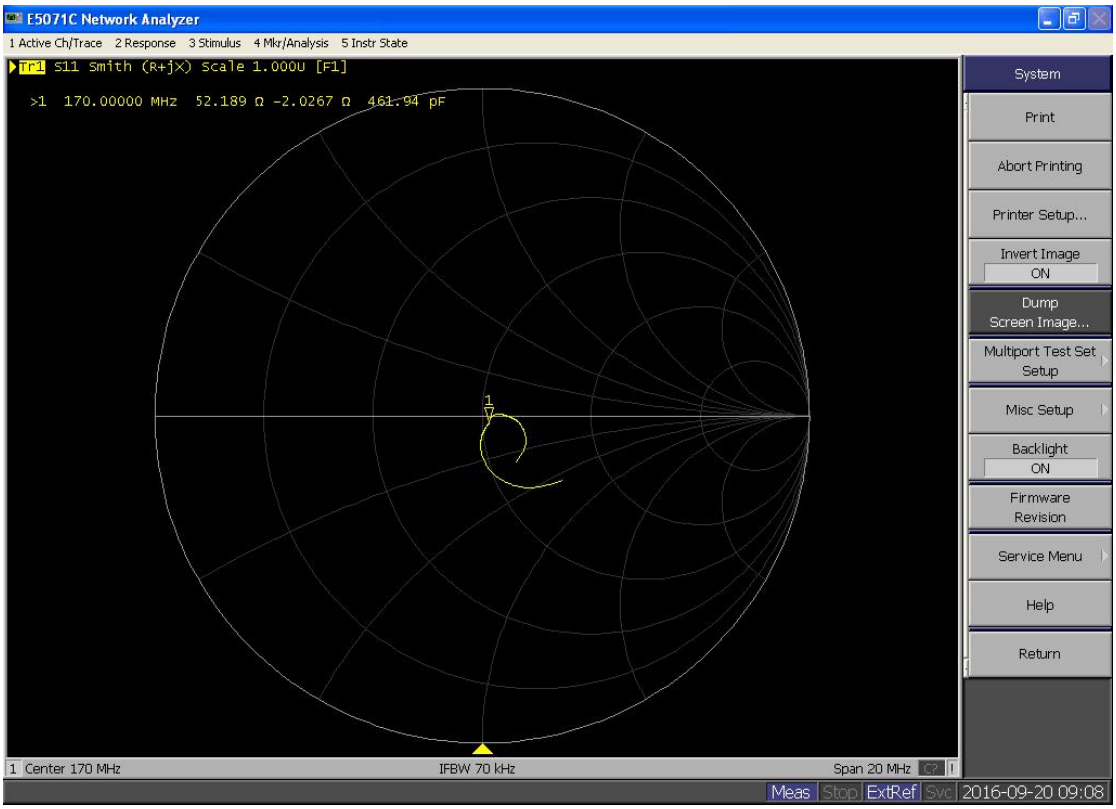

Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

# Test report TX170-XP-200

【Testing Instrument】： Angilent E5071C

【Test address】： Chengdu Ebyte Electronic Technology Co.,Ltd.




Copyright ©2012–2020， Chengdu Ebyte Electronic Technology Co.,Ltd. 

Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

# About us

Technical support: support@cdebyte.com

Documents and RF Setting download link: www.cdebyte.com

Thank you for using Ebyte products! Please contact us with any questions or suggestions: lirong@cdebyte.com

---

Phone：028-61543675

Web: www.cdebyte.com

Address:Building B5, Mould Industrial Park, 199# Xi-Qu Ave, West High-tech Zone, Chengdu, 611731, Sichuan, China

Chengdu Ebyte Electronic Technology Co.,Ltd.

Copyright ©2012–2020， Chengdu Ebyte Electronic Technology Co.,Ltd.



Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000