# TX433-JK-11 Datasheet v1.0

`



Chengdu Ebyte Electronic Technology Co.,Ltd.

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

## Picture TX433-JK-11



## Physical parameter TX433-JK-11

| No. | Parameter item | Parameter details & Description |
|---|---|---|
| 1 | Model | TX433-JK-11 |
| 2 | Size | Ø 10.0 * 110 mm |
| 3 | Average Weight | 10 ± 1 g |
| 4 | Shape Feature | Flexible |
| 5 | Color | Black |
| 6 | Material | TPEE |
| 7 | Connector Type | SMA-J |
| 8 | Cable Length | - |

## Electrical parameter TX433-JK-11

| No. | Parameter item | Parameter details & Description |
|---|---|---|
| 1 | Frequency Range | 410 ~ 450 MHz |
| 2 | Gain | 2.5 dBi |
| 3 | SWR | ≤ 1.5 |
| 4 | Power Capacity | 10 W |
| 5 | Input Impedance | 50 Ω |
| 6 | Polarization Type | Vertical polarization |
| 7 | Radiation Direction | Omnidirectional |

Copyright ©2012–2020， Chengdu Ebyte Electronic Technology Co.,Ltd.


LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

## Dimension TX433-JK-11




成都亿佰特
www.cdebyte.com





Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

# Test report TX433-JK-11

【Testing Instrument】： Angilent E5071C

【Test address】： Chengdu Ebyte Electronic Technology Co.,Ltd.

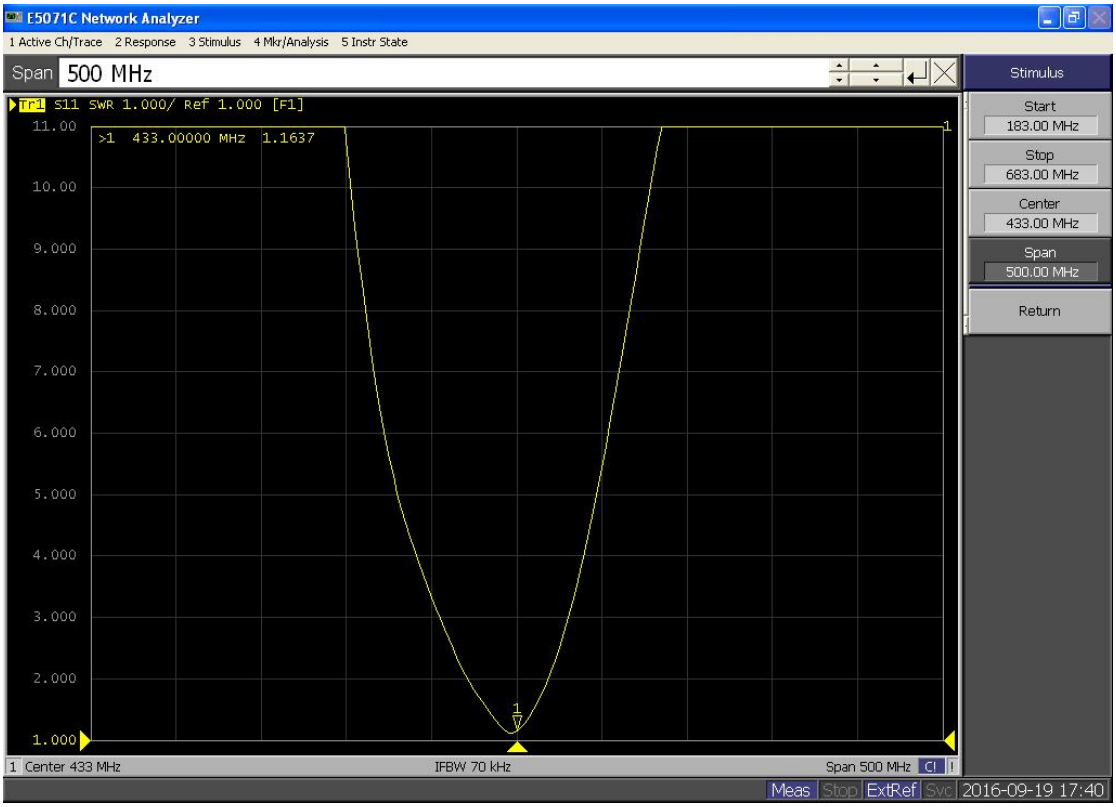

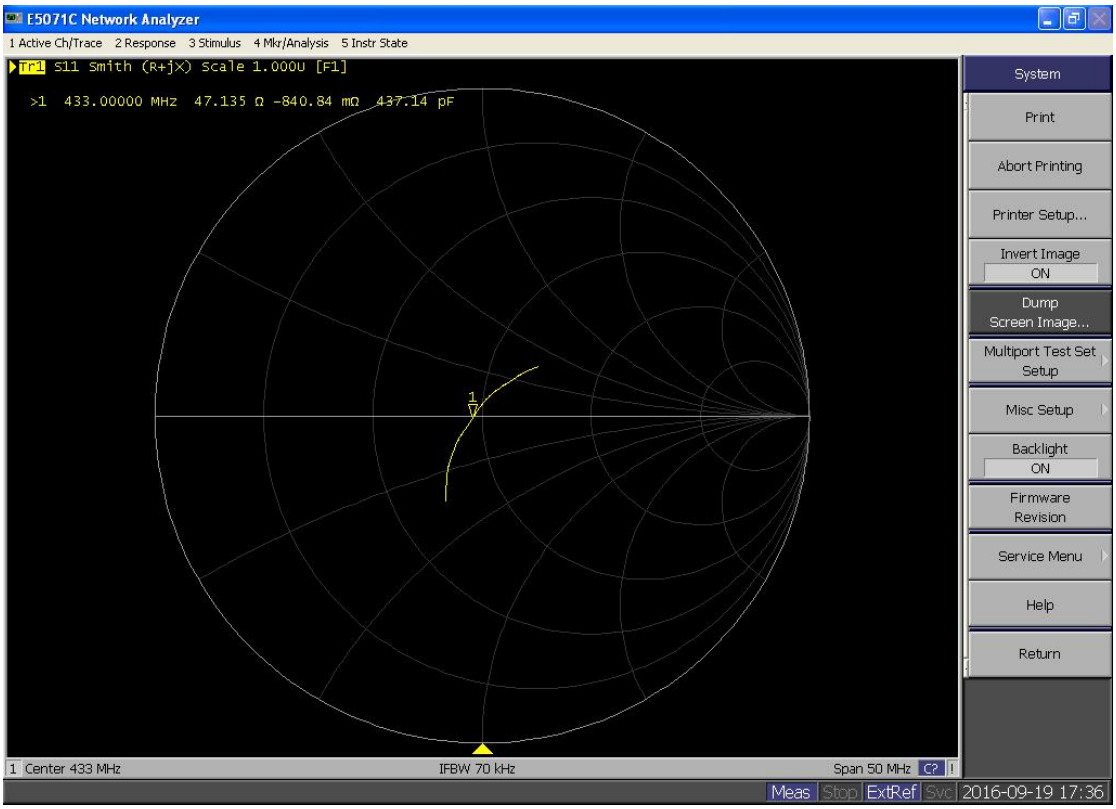
Copyright ©2012–2020， Chengdu Ebyte Electronic Technology Co.,Ltd. 

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

# About us

Technical support: support@cdebyte.com

Documents and RF Setting download link: www.cdebyte.com

Thank you for using Ebyte products! Please contact us with any questions or suggestions: lirong@cdebyte.com

---

Phone：028-61543675

Web: www.cdebyte.com

Address:Building B5, Mould Industrial Park, 199# Xi-Qu Ave, West High-tech Zone, Chengdu, 611731, Sichuan, China

Chengdu Ebyte Electronic Technology Co.,Ltd.

Copyright ©2012–2020， Chengdu Ebyte Electronic Technology Co.,Ltd.



Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000