TX915-XPL-100 Datasheet v1.0



Chengdu Ebyte Electronic Technology Co.,Ltd.

Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

Picture TX915-XPL-100



Physical parameter TX915-XPL-100

No.	Parameter item	Parameter details & Description
1	Model	TX915-XPL-100
2	Size	26 cm
3	Average Weight	28 ± 1 g
4	Shape Feature	Sucker antenna
5	Color	Black
6	Material	ABS+PC
7	Connector Type	SMA-J
8	Cable Length	100 cm

Electrical parameter TX915-XPL-100

No.	Parameter item	Parameter details & Description
1	Frequency Range	900 ~ 925 MHz
2	Gain	3.5 dBi
3	SWR	≤ 1.5
4	Power Capacity	10 W
5	Input Impedance	50 Ω
6	Polarization Type	Vertical polarization
7	Radiation Direction	Omnidirectional

Copyright ©2012–2020， Chengdu Ebyte Electronic Technology Co.,Ltd.

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

Dimension TX915-XPL-100




Copyright ©2012–2020， Chengdu Ebyte Electronic Technology Co.,Ltd.


Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

Test report TX915-XPL-100

【Testing Instrument】： Angilent E5071C

【Test address】： Chengdu Ebyte Electronic Technology Co.,Ltd.

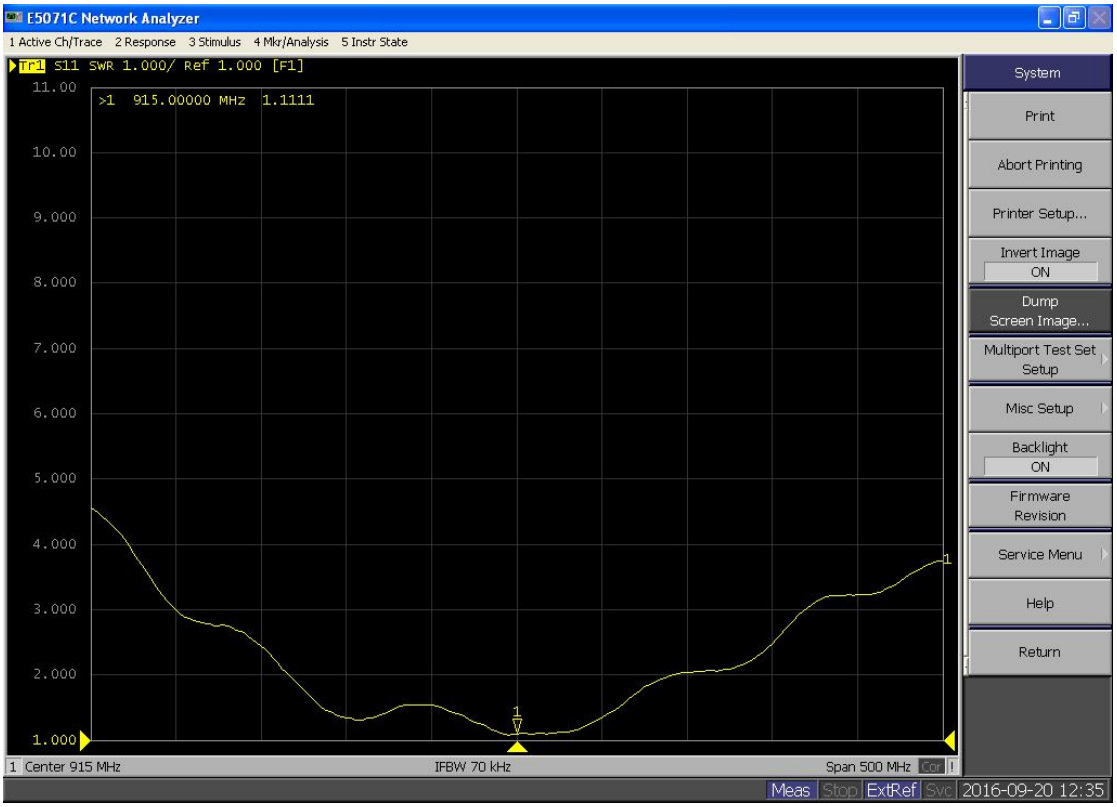

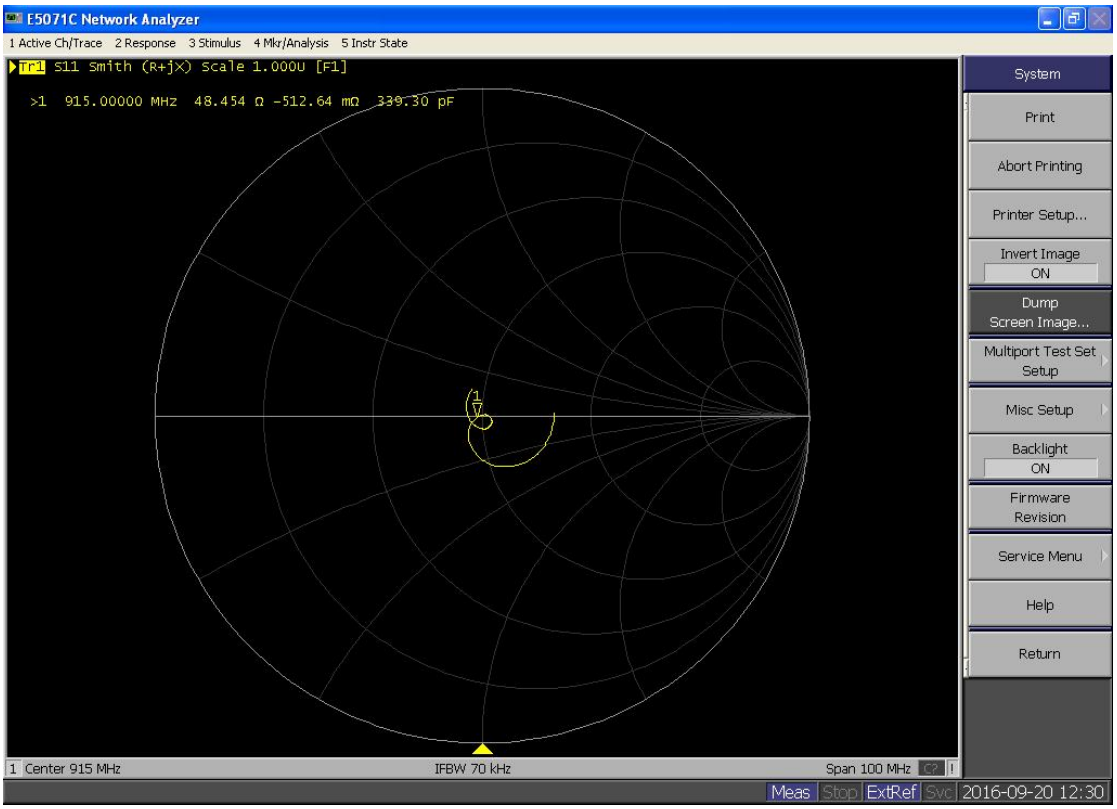

Copyright ©2012–2020， Chengdu Ebyte Electronic Technology Co.,Ltd.

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

About us

Technical support: support@cdebyte.com
Documents and RF Setting download link: www.cdebyte.com
Thank you for using Ebyte products! Please contact us with any questions or suggestions: lirong@cdebyte.com
---
Phone：028-61543675
Web: www.cdebyte.com
Address:Building B5, Mould Industrial Park, 199# Xi-Qu Ave, West High-tech Zone, Chengdu, 611731, Sichuan, China

Chengdu Ebyte Electronic Technology Co.,Ltd.

Copyright ©2012–2020， Chengdu Ebyte Electronic Technology Co.,Ltd.

Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000